



Inserts  
Wendeschneidplatten  
Plaquetas  
チップ

VNMA / VNMG



Rhombic35°  
Negative

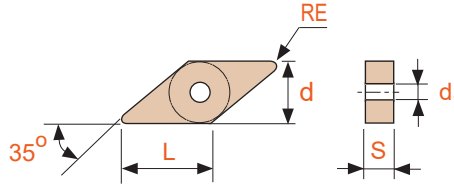

Size	L	d	S	d <sub>1</sub>
1604	16.6	9.525	4.76	4.4

Turning Inserts

Grade

Coating

P M K N S H

RE

fz (mm/rev)

Ap (mm)

Roughing

<b>VNMA</b>	160404	KT6415	CVD		0.4	0.08 - 0.24	0.4 - 2.5
	160408						

KT6415	CVD		0.4	0.08 - 0.24	0.4 - 2.5
KT6415	CVD		0.8	0.08 - 0.24	0.8 - 2.5

CVD		0.4	0.08 - 0.24	0.4 - 2.5
CVD		0.4	0.08 - 0.22	0.3 - 2.5
CVD		0.8	0.08 - 0.24	0.3 - 2.5
CVD		0.8	0.08 - 0.22	0.3 - 2.5

0.4	0.08 - 0.24	0.4 - 2.5
0.8	0.08 - 0.24	0.8 - 2.5

0.4	0.08 - 0.24	0.4 - 2.5
0.4	0.08 - 0.22	0.3 - 2.5
0.8	0.08 - 0.24	0.3 - 2.5
0.8	0.08 - 0.22	0.3 - 2.5


Semi-finishing

<b>VNMG</b>	160404	KT6415	CVD		0.4	0.08 - 0.24	0.3 - 2.5						
								KT4625	CVD		0.4	0.08 - 0.22	0.3 - 2.5
	160408							KT6415	CVD		0.8	0.08 - 0.24	0.3 - 2.5

KT6415	CVD		0.4	0.08 - 0.24	0.3 - 2.5
KT4625	CVD		0.4	0.08 - 0.22	0.3 - 2.5
KT6415	CVD		0.8	0.08 - 0.24	0.3 - 2.5
KT4625	CVD		0.8	0.08 - 0.22	0.3 - 2.5

CVD		0.4	0.08 - 0.24	0.3 - 2.5
CVD		0.4	0.08 - 0.22	0.3 - 2.5
CVD		0.8	0.08 - 0.24	0.3 - 2.5
CVD		0.8	0.08 - 0.22	0.3 - 2.5

0.4	0.08 - 0.24	0.3 - 2.5
0.4	0.08 - 0.22	0.3 - 2.5
0.8	0.08 - 0.24	0.3 - 2.5
0.8	0.08 - 0.22	0.3 - 2.5

0.4	0.08 - 0.24	0.3 - 2.5
0.4	0.08 - 0.22	0.3 - 2.5
0.8	0.08 - 0.24	0.3 - 2.5
0.8	0.08 - 0.22	0.3 - 2.5


ISO Negative